

# **EXPORT CATALOGUE**

## **EFFECTIVE FROM MARCH 2026**

# **MISCELLANEOUS**






## **AND ORIGINAL ACCESSORIES**



**SICE**  
AUTOMOTIVE EQUIPMENT

**REL. MARCH 2026**

## COLOR TABLE

Standard		RAL 1007	Yellow	A => /40
Optional		RAL 3002	Red	B => /16
Optional		RAL 5015	Blue	C => /25
Optional		RAL 9006	Light gray	D => /36
Main frame is always dark grey RAL 7016 				=> /34

NEXION SPA reserves the right to change the specifications of its products at any time without prior notice. The company declines all responsibility in the event of claims deriving from the use of non-original accessories or spare parts with consequent forfeiture of the EC declaration of conformity.

# SUMMARY

<b>AUXILIARY WHEEL LIFTERS</b>	<b>4</b>
PARTNER 70	4
<b>RIM REPAIR SYSTEM</b>	<b>5</b>
RR04	5
RR06	5
<b>NITROGEN GENERATOR</b>	<b>6</b>
N 300	6
N 500	6
N 1800	6
OPTIONAL ACCESSORIES FOR SERIE N	7
<b>WHEEL WASHER</b>	<b>9</b>
LS 850	9
OPTIONAL ACCESSORIES FOR LS 850	10
<b>VULCANIZERS</b>	<b>12</b>
SVP1	12
SVP2	12
SVP3	12
SVP4	13
SVP5	13
SVP5/L	13
OPTIONAL ACCESSORIES FOR VULCANIZERS	14
<b>TYRE TEST TANKS</b>	<b>15</b>
AL18	15
AL24	15
<b>AIR CONDITIONING SYSTEM DIAGNOSIS AND RECHARGE STATION</b>	<b>16</b>
A/C 1100 SERIES	16
A/C 1105 SERIES	17
A/C 1600 SERIES	18
A/C 1605 SERIES	19
OPTIONAL ACCESSORIES	20

## PARTNER 70

Battery-Operated Wheel Lifter - it helps to easily and safely demount, move and mount the wheels of cars, SUVs and LT vehicles weighting up to 70kg



Code	Electric supply	Description	
8-21120020/64		<b>PARTNER 70</b>	


## RR04

## RR06

### STANDARD ACCESSORIES



### STANDARD ACCESSORIES

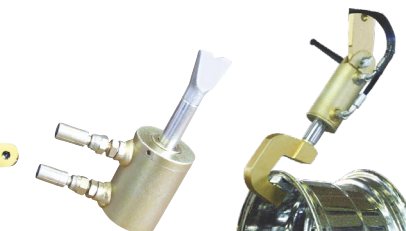

**NEW!**

Code	Electric supply	Description
0-51500801/67	400V/3Ph/50-60Hz	<b>RR04</b> Rim Repair System (rim Ø 10" - 24")
0-51500802/67	230V/1Ph/50-60Hz	<b>RR04</b> Rim Repair System (rim Ø 10" - 24")
8-51100072		<b>Customization kit for RR04</b> , compulsory
0-51500901/67	400V/3Ph/50-60Hz	<b>RR06</b> Rim Repair System (rim Ø 10" - 26")
0-51500902/67	230V/1Ph/50-60Hz	<b>RR06</b> Rim Repair System (rim Ø 10" - 26")
8-51100073		<b>Customization kit for RR06</b> , compulsory

## N SERIES



**N 300**







**N 500**








**N 1800**

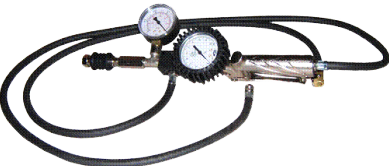Code	Electric supply	Description	
0-55401200/16		<b>N 300</b> Nitrogen generator with capacity 3,0 Nm 3/h (3000 lit/h).	
0-55401300/16		<b>N 500</b> Nitrogen generator with capacity 5,0 Nm 3/h (5000 lit/h).	
0-55401600/16		<b>N 1800</b> Nitrogen generator with capacity 18,0 Nm 3/h (18.000 lit/h).	

## OPTIONAL ACCESSORIES FOR SERIE N


Image	Description	Code	
	<p><b>WS</b> Cyclonic condensate separator.</p>	<p>8-53600000</p>	
	<p><b>AT</b> Pipes take-up.</p>	<p>8-55600001</p>	
	<p><b>PSG</b> Professional inflating and deflating pistol.</p>	<p>8-55600002</p>	
	<p><b>EC</b> Inflating and deflating pistol, pressure gauge BAR G 1/4"</p>	<p>8-11100362</p>	

## OPTIONAL ACCESSORIES FOR SERIE N

Image	Description	Code	
	<p><b>EC</b> Inflating and deflating pistol, pressure gauge BAR and PSI G 1/4"</p>	8-51120007	
	<p><b>NT</b> Kit for measuring purity.</p>	8-11600127	
	<p><b>Kit</b> filter cartridges 3-5 Nm3/h.</p>	8-55600023	
	<p><b>Kit</b> filter cartridges 20 Nm3/h.</p>	8-55600024	
	<p><b>Air contamination</b> indicator.</p>	8-55600025	



## LS 850
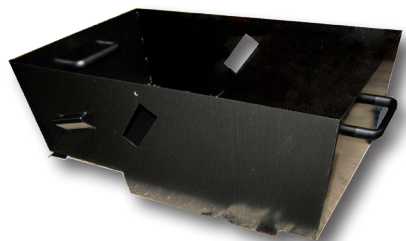
### STANDARD ACCESSORIES







Code	Electric Supply	Description	
0-55400800/34	400V / 3Ph / 50Hz	LS 850 B with steel tank, without heater.	
0-55400700/34	400V / 3Ph / 50Hz	LS 850 P with steel tank and heater.	
0-55401500/34	400V / 3Ph / 50Hz	LS 850 T with stainless steel tank and heater.	

## OPTIONAL ACCESSORIES FOR LS 850

Image	Description	Code	
	<p><i>RTP</i> kit, replacing kit for drive roller.</p>	8-55600026	
	<p><i>RSA kit</i>, replacing kit for support roller.</p>	8-55600027	
	<p><i>SLR</i> Wheel Lifter.</p>	8-51120005	

## OPTIONAL ACCESSORIES FOR LS 850

Image	Description	Code	
	<p><b>Set of granules</b> for filling and replacement (15 kg.).</p>	8-51100063	
	<p>Non-foaming <b>liquid detergent</b>, 10 lt.</p>	8-55600010	
	<p><b>VSS</b> Ball faucet for water drainage.</p>	8-55600019	
	<p><b>RCS</b> Elbow fitting for water drainage.</p>	8-55600018	



## SVP1



## SVP2



## SVP3

Code	Electric Supply	Description	
0-51400310/40	230V/1Ph/50-60Hz	<b>SVP1</b> with manual lever operated plate clamping	
0-51400320/40	230V/1Ph/50-60Hz	<b>SVP2</b> With air-operated closing mechanism, to repair inner tubes and lightweight tyres	
0-51400330/40	230V/1Ph/50-60Hz	<b>SVP3</b> Strongly built and easy to use, ideal to repair inner tubes and light weight tyres 600W heating plate.	



## SVP4



## SVP5



## SVP5/L

Code	Electric Supply	Description	
0-51400340/40	230V/1Ph/50-60Hz	<b>SVP4</b> Vulcanizer with double heating plate airoperated system to close the plates monitored by a pressure governor	
0-51400350/40	230V/1Ph/50-60Hz	<b>SVP5</b> Vulcanizer with mechanically closed double heating plate.	
0-51400355/40	230V/1Ph/50-60Hz	<b>SVP5/L</b> Vulcanizer with mechanically closed double heating plate. Portable and easy to handle. Complete with 120 minutes timer. Two wide 600 W heating plates.	


## OPTIONAL ACCESSORIES FOR VULCANIZERS

<i>Image</i>	<i>Description</i>	<i>Code</i>	
	<i>Support</i> stand	805420833	

## AL18



## AL24

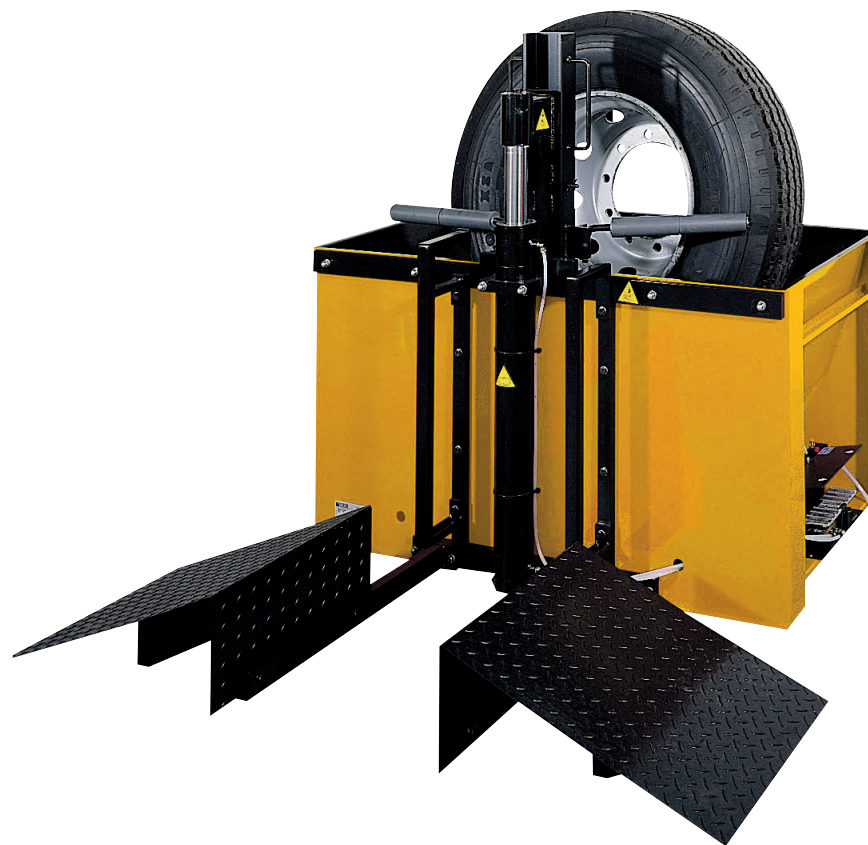

Code	Electric Supply	Description	
0-51400200/40		<b>AL18</b> Air-operated with 6/8 bar operating pressure, complete with wheel holder lifting and lowering control. Maximum wheel diameter 800 mm. Maximum wheel width 320 mm.	
0-51410200/40		<b>AL24</b> Complete with air filter, air-operated with 8 bar operating pressure. Maximum wheel diameter 1300 mm. Maximum wheel width 500 mm.	

## A/C 1100 SERIES

AIR CONDITIONING SYSTEM DIAGNOSIS  
AND RECHARGE STATIONS



Code	Electric Supply	Description	
0-66501001/64	230V/1Ph/50-60Hz	<b>A/C 1100</b> Air Conditioning recharging station, R-134a refrigerant only, manual and automatic functions, recovery-recycle-recharge, hybrid vehicle management, 192x64pixels LCD display, Wi-Fi/BT connection	
0-66501401/64	230V/1Ph/50-60Hz	<b>A/C 1100P</b> Air Conditioning recharging station, R-134a refrigerant only, manual and automatic functions, recovery-recycle-recharge, hybrid vehicles management, 192x64pixels LCD display, Wi-Fi/BT connection, printer included	

# A/C 1105 SERIES

AIR CONDITIONING SYSTEM DIAGNOSIS  
AND RECHARGE STATIONS



Code	Electric Supply	Description
0-66501101/64	230V/1Ph/50-60Hz	<b>A/C 1105</b> Air Conditioning recharging station, R-1234yf refrigerant only, manual and automatic functions, recovery-recycle-recharge, hybrid vehicles management, 192x64pixels LCD display, Wi-Fi/BT connection
0-66501501/64	230V/1Ph/50-60Hz	<b>A/C 1105P</b> Air Conditioning recharging station, R-1234yf refrigerant only, manual and automatic functions, recovery-recycle-recharge, hybrid vehicle management, 192x64pixels LCD display, Wi-Fi/BT connection, printer included

# A/C 1600 SERIES

AIR CONDITIONING SYSTEM DIAGNOSIS  
AND RECHARGE STATIONS



Code	Electric Supply	Description
0-66501201/64	230V/1Ph/50-60Hz	<b>A/C 1600</b> Fully automatic Air Conditioning recharging station, R-134a refrigerant only, manual and automatic functions, recovery-recycle-recharge, hybrid vehicles management, 7" 800x480pixels TFT-LCD RBG display , Wi-Fi/BT connection
0-66501601/64	230V/1Ph/50-60Hz	<b>A/C 1600P</b> Fully automatic Air Conditioning recharging station, R-134a refrigerant only, manual and automatic functions, recovery-recycle-recharge, hybrid vehicles management, 7" 800x480pixels TFT-LCD RBG display , Wi-Fi/BT connection, printer included




# A/C 1605 SERIES

AIR CONDITIONING SYSTEM DIAGNOSIS  
AND RECHARGE STATIONS



Code	Electric Supply	Description
0-66501301/64	230V/1Ph/50-60Hz	<b>A/C 1605</b> Fully automatic Air Conditioning recharging station, R-1234yf refrigerant only, manual and automatic functions, recovery-recycle-recharge, hybrid vehicles management, 7" 800x480pixels TFT-LCD RBG display , Wi-Fi/BT connection
0-66501701/64	230V/1Ph/50-60Hz	<b>A/C 1605P</b> Fully automatic Air Conditioning recharging station, R-1234yf refrigerant only, manual and automatic functions, recovery-recycle-recharge, hybrid vehicles management, 7" 800x480pixels TFT-LCD RBG display , Wi-Fi/BT connection, printer included

## OPTIONAL ACCESSORIES FOR AIR CONDITIONING SYSTEM DIAGNOSIS AND RECHARGE STATION

Image	Description	Code	
	<p><b>High/low</b> pressure pipes kit, L=4,5 mt for, R1234yf refrigerant</p>	8-66500010	
	<p><b>High/low</b> pressure pipes kit, L=4,5 mt, for R134a refrigerant</p>	8-66500011	
	<p><b>Leak detector</b> with Nitrogen</p>	8-66500209	
	<p><b>Leak detector kit</b> including UV lamp and glasses only.</p>	6019000305	



